

02-07-00

A

jc490 U.S. PTO
02/04/00

Case Docket No. US000018

THE COMMISSIONER OF PATENTS AND TRADEMARKS, Washington, D.C. 20231

Enclosed for filing is the patent application of Inventor(s):

J. DAVID SCHAFER

For: ADAPTIVE TV PROGRAM RECOMMENDER

ENCLOSED ARE:

- [X] Associate Power of Attorney;
- [X] Information Disclosure Statement, Form PTO-1449 and copies of documents listed therein;
- [] Preliminary Amendment;
- [X] Specification (36 Pages of Specification, Claims, & Abstract);
- [X] Declaration and Power of Attorney:
(2 Pages of a [X]fully executed []unsigned Declaration);
- [X] Drawing (8 sheets of [X]informal []formal sheets);
- [] Certified copy of application Serial No. ;
- [X] Other: Authorization Pursuant to 37 CFR 1.136
- [X] Assignment to Philips Electronics North America Corporation

jc511 U.S. PTO
09/498271
02/04/00

FEE COMPUTATION

CLAIMS AS FILED				
FOR	NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE - 760.00
Total Claims	52- 20 =	32	X \$18 =	576.00
Independent Claims	4 - 3 =	1	X \$78 =	78.00
Multiple Dependent Claims, if any			\$260 =	0.00
TOTAL FILING FEE				\$1,414.00

Please charge Deposit Account No. 14-1270 in the amount of the total filing fee indicated above, plus any deficiencies. The Commissioner is also hereby authorized to charge any other fees which may be required, except the issue fee, or credit any overpayment to Account No. 14-1270.


[] Amend the specification by inserting before the first line the sentence: --This is a continuation-in-part of application Serial No. , filed .--.

CERTIFICATE OF EXPRESS MAILING

Express Mail Mailing Label No. EL335550664

Date of Deposit FEBRUARY 4, 2000
I hereby certify that this paper and/or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

NOEMI CHAPA Noemi Chapa
Printed Name Signature


Edward W. Goodman, Reg. No. 28,613
Attorney
(914) 333-9611
U.S. Philips Corporation
580 White Plains Road
Tarrytown, New York 10591
F:\WPDOCS\GO\MR04GO

February 4, 2000 (3:40PM)

ID 700690

BAYESIAN TV SHOW RECOMMENDER

A PATENT APPLICATION BY:

INVENTOR:

J. DAVID SCHAFFER

DRAFTING ATTORNEY

ANNE E. BARSCHALL

REG. NO. 31,089

I. BACKGROUND OF THE INVENTION

A. Field of the Invention

The invention relates to recommending television shows based on a user profile.

5

B. Related Art

U.S. Pat. No. 5,758,259 shows a method for identifying a preferred television program based on a "correlation" between the program and predetermined characteristics of a user profile. The term "correlation" as used in the patent does not appear to relate to the mathematical concept of correlation, but rather is a very simple algorithm for assessing some similarity between a profile and a program.

15

II. SUMMARY OF THE INVENTION

It is an object of the invention to improve techniques of automatic program recommendation.

20

This object is achieved by using a probabilistic calculation, based on a viewer profile. The probabilistic calculation is preferably based on Bayesian classifier theory.

The object is further achieved by maintaining a local record

of a viewer history. The local record is preferably incrementally updatable. The local record is advantageous for privacy reasons, and can be contrasted with methods such as collaborative filtering, which would require viewer history information to be uploaded to a central location. The use of incremental updates is advantageous in minimizing storage requirements.

It is a still further object of the invention to improve the classical Bayesian classifier technique.

In one embodiment, this object is achieved by noise filtering.

In another embodiment, this object is achieved by applying a modified Bayesian classifier technique to non-independent feature values.

Further objects and advantages of the invention will be described in the following.

Bayesian classifiers are discussed in general in the text book Duda & Hart, Pattern Recognition and Scene Analysis (John Wiley & Sons 1973). An application of Bayesian classifiers to document retrieval is discussed in D. Billsus & M. Pazzani, "Learning Probabilistic User Models", [http://www.dkfi.uin-sb.de/~bauer/um-
ws/Final-Versions/Billsus/ProbUserModels.html](http://www.dkfi.uin-sb.de/~bauer/um-
ws/Final-Versions/Billsus/ProbUserModels.html)

III. BRIEF DESCRIPTION OF THE DRAWING

The invention will now be described by way of non-limiting example with reference to the following drawings.

Fig. 0 shows a system on which the invention may be used.

Fig. 1 shows major elements of an adaptive recommender.

Fig. 2 shows pseudo code for a viewing history generator.

Fig. 3 shows a table of key fields.

Fig. 4 shows a fragment of a viewer profile.

Fig. 5a shows a prior probability calculation.

Fig. 5b shows a conditional probability calculation.

Fig. 5c shows a posterior probability calculation.

IV. DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig 0 illustrates hardware for implementing the invention.

The hardware will typically have a display 1; some type of processor 2; some type of user entry device 4 connected to the processor via some type of connection 3; and some type of link 5 for receiving data, such as television programming or Electronic Programming Guide ("EPG") data. The display 1 will commonly be a television screen, but could be any other type of display device.

The processor 2 may be a set top box, a PC, or any other type of data processing device, so long as it has sufficient processing power. The user entry device 4 may be a remote and the

connection 3 may be an infrared connection. If the processor is a PC, the user entry device will commonly be at least plural, e.g. a keyboard and mouse. The user entry device may also be touch sensitivity on the display. The connection 5 to the outside world could be an antenna, cable, a phone line to the internet, a network connection, or any other data link. Equally well, connection 5 could connect to a memory device or several memory devices.

Fig. 1 illustrates major elements of an embodiment of an adaptive recommender. These elements preferably reside as software and data in a medium 110 readable by a data processing device such as CPU 2. The elements include a viewing history data structure 101 that gives input to profiler software 102. The profiler software in turn produces the viewer profile 103. The terms "user profile" and "viewer profile" shall be used interchangeably herein. The viewer profile serves as input to recommender software 104. The recommender software also uses, as input, the EPG data structure 105, that contains features describing each show such as title, channel, start time and the like. An output of the recommender 104 appears on a user interface 106 where a user can interact with it.

This viewer history data structure includes selected records from the EPG database. The EPG databases are commercially

available, for instance from Tribune Media Services. Those of ordinary skill in the art may devise other formats, possibly with finer shades of description. The selected records minimally correspond to TV shows watched by the viewer. It is assumed that these records have been deposited in the viewing history by software that is part of the user interface and knows what shows the viewer has viewed. Preferably, the software would allow recording of a user watching more than one show in a given time interval, as users often do switch back and forth during commercials and so forth. Preferably, also, the software records a program as watched; and whether a show was watched or whether it was taped for later viewing.

The preferred viewing history format assumes the presence of both positive and negative records in the viewing history. This is needed because the goal is to learn to differentiate between the features of shows that are liked and those not liked. Fig. 2 shows pseudo code for collecting the viewing history.

Let the notation C^+ denote the set of positive (i.e., watched) shows and C^- denote the negative (i.e., not watched) shows.

The viewer profile includes a number of feature value counts. These counts will be incremented whenever new entries are deposited in the viewer history. Usually, each program will

have several feature values. Accordingly, the deposit of a program in the viewer history will cause the update of counts associated with all feature values associated with that program.

The incremental updatability of this type of profile is advantageous because it allows for ongoing adaptation of the viewer profile without a large amount of storage or computing effort being required.

In addition to the count of the number of positive and negative entries ($k(C+)$, $k(C-)$), a count of occurrences of individual features will also be kept among the positive and negative examples ($k(f_i|C+)$, $k(f_i|C-)$) where f_i denotes feature i and $k(f_i|C+)$ denotes the number of shows in set $C+$ that possess feature f_i . The feature set will include entries in the EPG records extracted from selected key fields, an example of which is shown in Table 1 which is Fig. 3.

A partial example of an embodiment of such counts is presented in table 2, shown in Fig. 4 to illustrate the idea. The list is presented in the Figure in six columns to save space, but in fact the list has only three columns, with the later part of the table being presented next to the earlier part. Each row of the column has four pieces of data: a feature type and a feature value in the first column, a positive count in the second column, and a negative count in the third column. The positive count

indicates the number of times a program having that feature value has been watched. The negative count indicates the number of times a program having that feature value has not been watched.

A television program schedule normally includes several, if not many, programs for every time slot in every day. Normally, the user will only watch one or two of the programs in any given slot. If the viewer profile contains a list of ALL the programs not watched, the number of programs not watched will far exceed the number of programs watched. It may be desirable to create a method for sampling the programs not watched. For instance, as the processor assembles the viewer profile, the processor may chose a single not watched program at random from the weekly schedule as a companion for each watched program, as suggested in the pseudocode of Fig. 2. This design will attempt to keep the number of positive and negative entries in the viewing history about equal so as not to unbalance the Bayesian prior probability estimates, discussed below.

It is not generally desirable to choose a companion program from the same time slot as a watched program. Experiment has shown that the combined time and day feature value is typically the strongest or one of the strongest predictors of whether a particular program will be preferred. Thus another program at the same time as the watched program may well be a second or

third choice program, while a program at a totally different time may be very undesirable. Accordingly, it is preferred to choose the companion program at random from the program schedule of the entire week that includes the watched program.

5 Since time and day feature values for a program are often so important in determining whether a program will be of interest to a user, it is typically undesirable to consider two programs of identical content to be the same if they are shown on different days and/or at different times. In other words a particular
10 episode of a series may be strongly preferred if it is shown at 8 p.m. on Tuesclay, while the same episode of the same series may be completely undesirable if it is shown at 10 a.m. on Monday. Thus the episode at 10 a.m. should be considered a different program from the episode at 8 p.m., even though the content of the two
15 are identical.

As more and more shows are viewed, the length of the profile will tend to grow larger and larger. To combat this, and to keep the focus on features that are effective discriminators, the following are recommended:

- 20 - periodic reviews of the features in the viewer profile, and
- removal of words that appear to be frequent and not very discriminating.

In general, those of simple tastes, e.g. those who only like to watch football, will be fairly easy to recommend for after taking of a viewer history for a relatively short time. For those of more complex preferences, it will take longer for the viewer history to be sufficiently meaningful to make good recommendations. These latter people, however, are those who are probably most in need of a recommendation.

In the final analysis, viewer histories will always be ambiguous. Recommendations of shows based on such histories will always contain a margin for error. The recommendations can at best be said to have some probability of being correct. Therefore probabilistic calculations are useful in analyzing viewer profile data to make recommendations.

The preferred embodiment of the recommender uses a simple Bayesian classifier using prior and conditional probability estimates derived from the viewer profile. How recommendations are shown to viewers is not defined here, yet it will be assumed that one can capture the viewer's response to them, at least observing whether or not they were watched.

Below will be discussed a 2-class Bayesian decision model.

The two classes of TV shows of interest are:

C1 - shows that interest the viewer

5 *C2* - shows that do not interest the viewer

Other classes might be used showing more shades of interest or lack thereof.

10 In contrast with the classes of interest listed above, viewing history contains information only on the classes:

C+ - shows the viewer watched

C- - shows the viewer did not watch

15 Determining which shows a user watched or did not watch is outside of the scope of this application. The user might enter a manual log of which shows s/he watched. Alternatively, hardware might record the user's watching behavior. Those of ordinary
20 skill in the art might devise numerous techniques for this. It should be possible to consider shows as watched even if they are watched only for a short time, as a user may be switching back and forth between several shows, trying to keep track of all of

them.

Inferences may be made about classes $C1$ and $C2$ based on observations, but these inferences will always contain an element of uncertainty. The Bayesian model will compute the prior probabilities $P(C+)$ and $P(C-)$ directly from the counts in the viewer profile in accordance with Fig. 5a. In other words, the assumption will be that shows not watched are generally those the viewer is not interested in, and that the shows watched are the ones that the viewer is interested in.

The conditional probabilities, that a given feature, f_i , will be present if a show is in class $C+$ or $C-$, are then computed in accordance with Fig. 5b. These calculations can be performed once a day during times that the TV is not being viewed and stored in the viewer profile.

Recommendations for upcoming shows can be computed by estimating the posterior probabilities, i.e. the probability that a show is in class $C+$ and $C-$ given its features. Let \mathbf{x} be a binary vector $(x_1, x_2, \dots, x_i, \dots, x_n)$ where i indexes over the features in the viewer profile and where $x_i = 1$ if feature f_i is present in the show being considered for recommendation and 0 if not. For the exclusive features, like day, time, and station, where every show must have one and only one value, the index i will be taken to indicate the value present in the show being

considered provided that this value is also present in the profile. Otherwise, novel exclusive features will not enter into the calculations. For non-exclusive features, the index i will range over all values present in the profile; non-exclusive features novel to the considered show will not contribute to the calculations. The posterior probabilities are estimated in accordance with Fig. 5c

With these estimates in hand, a show will generally be recommended if $P(C+|\mathbf{x}) > P(C-|\mathbf{x})$ and the "strength" of the recommendation will be proportional to $P(C+|\mathbf{x}) - P(C-|\mathbf{x})$. One potential problem with this scheme is that some conditional probabilities are likely to be zero. Any zero in a chain multiplication will reduce the result to zero so some means for eliminating zeros is needed. The Billsus and Pazzani article referenced above presents a couple of schemes, including simply inserting a small constant for any zeros that occur.

One method for dealing with zeroes in the conditional probability multiplication chain would be as follows. One can choose a heuristic of 1000. If the number of shows in the viewing history is less than 1000, then the value of $1/1000$ can be substituted for zero. If the number of shows in the viewing history is greater than 1000, the correction can be

$$\frac{k_i + 1}{k + 2}$$

Where

$k_i +$ is the number of watched shows having feature i

$k +$ is the total number of watched shows.

This is what is called the Laplace correction in the Billsus and
5 Pazzani article. This Laplace correction must also be done for
the not watched shows.

Alternative schemes may be devised by those of ordinary
skill in the art.

Classical Bayesian theory would require the use of all
10 accumulated elements of the list of Fig. 4 in making a
recommendation. Nevertheless, in some instances it may be useful
to use a noise cutoff, eliminating features from consideration if
insufficient data about them appears in the list. For instance
if a particularly feature did not appear in more than some given
15 percentage of shows considered, whether in negative or in
positive court, it might be ignored in determining which
recommendation to make. Experimentally it was found that a
cutoff of 5% was far too large.

Rather than use a percentage, one embodiment of the noise
20 cutoff would use the viewer profile itself to determine the
cutoff. This embodiment would first take a subset, or sub-list,
of the viewer profile relating to particular feature types. For

instance, a sub-list might advantageously comprise all of the elements of the viewer profile relating to the feature types: time of day and day of the week. Alternatively, in another example, the sub-list might advantageously comprise all of the elements of the viewer profile relating to channel number. Generally the feature type or types chosen should be independent feature types, in other words feature types which do not require another feature type to be meaningful.

The sub-list is then sorted by negative count, i.e. by number of shows having a particular feature value and not being watched. The highest negative count in this sorted list can be viewed as the noise level. In other words, since, in the preferred embodiment, the "not watched" shows are chosen at random from the week's program schedule, counts as large as the noise level can occur by chance, and therefore should be ignored.

Thus any feature having both a positive and a negative count at or below the noise level need not be considered in the Bayesian calculation in making a recommendation. This example of noise level thresholding has used a particular feature, e.g. day/time as one for determining noise cutoff. In general, any feature that is uniformly randomly sampled by the negative example sampling procedure may be chosen by those of ordinary skill in the art for the calculation of the noise threshold.

The calculations of Figs. 5a-c are advantageous in that they require fairly low computing power to complete and are therefore readily adaptable to modest hardware such as would be found in a set top box.

5

"Surprise Me" Feature

Recommendations according to the above-described scheme will be programs having a preponderance of features that are present in shows that have been watched. The viewer profiles accumulated will not yield any meaningful recommendations with respect to shows having few features in common with those features that are in the watched and not watched shows and register above the noise level. Accordingly, optionally, the recommender may occasionally recommend shows at random, in a "surprise me" feature. The surprise me feature would recommend programs with relatively few features in common with watched and not watched shows, to the extent that such features register above the noise level.

Using the user profile in other domains

Once a user profile is developed, the recommendation techniques of the invention might be used to recommend other types of items such as movies, books, audio recordings, or even promotional materials such as tee shirts or posters.

Non-independence of Features

The classical assumption in the domain of Bayesian classifier theory is that all features are independent.

5 Therefore, if a features is, say, often present in positive shows, but is missing from a show being considered for recommendation, the fact should count against the show. However, this may yield undesirable results for the current application.

10 For example, let us assume that there are five day/time slots indicated in the user profile as being most watched. Let us assume further that a particular show being evaluated falls within one of those five slots. The calculation of Fig. 5c would then give rise to an increase in probability for the day/time slot that matches and a decrease for the four day/time slots that
15 do not match. Intuitively, it appears that the latter decrease is not reasonably related to an accurate determination of probability for the show in question. The different values of day/time are not independent -- as every show has one and only one value, so the values a show does not have should not count
20 against it.

To remedy this deficiency in the classical Bayesian approach, it is proposed to designate features into two types: set 1 and set 2. If a feature is designated set 1, the Bayesian

calculation will ignore any non-matching values of the feature. If the feature is designated set 2, then the normal Bayesian calculation, per Fig. 5c, will be done.

Normally in a television application set 1 would include
5 day/time; station; and title. Some features which have values only for a few shows, e.g. critic ratings, should also be set 1, because too many shows would be non-matching merely because critics tend to rate only a tiny percentage of shows.

Set 2, for television shows, would normally include all
10 features that can have several values per show, such as actor.

From reading the present disclosure, other modifications
will be apparent to persons skilled in the art. Such
modifications may involve other features which are already known
in the design, manufacture and use of television interfaces and
15 which may be used instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present
application also includes any novel feature or novel combination
20 of features disclosed herein either explicitly or implicitly or any generalization thereof, whether or not it mitigates any or all of the same technical problems as does the present invention.

The applicants hereby give notice that new claims may be

February 4, 2000 (3:52PM)

ID 700690

formulated to such features during the prosecution of the present application or any further application derived therefrom.

The word "comprising", "comprise", or "comprises" as used herein should not be viewed as excluding additional elements.

5 The singular article "a" or "an" as used herein should not be
viewed as excluding a plurality of elements.

[illegible]

V. CLAIMS

1 1. A data processing device comprising:

2 - at least one input for receiving data including

3 - viewer profile data; and

4 - data regarding a television program; and

5 - a processor, the processor being adapted to perform the
6 following

7 - calculating a probability that the television program
8 is a desired one; and

9 - supplying a recommendation regarding the television
10 program based on the probability.

11 2. The data processing device of claim 1 wherein the input is
12 coupled with a medium readable by the data processing device.

1 3. The data processing device of claim 2, wherein the medium
2 embodies the viewer profile.

1 4. The data processing device of claim 3, wherein

2 ➤ the medium is local to the data processing device and

3 ➤ the viewer profile is arranged so as to be incrementally

4 updatable.

1 5. The data processing device of claim 3, wherein the processor
2 maintains the viewer profile in accordance with a data
3 structure comprising:

4 ➤ a list of feature values; and

5 ➤ for each element of the list, a respective number of times
6 programs having that feature value were watched.

1 6. The data processing device of claim 5, wherein the data
2 structure further comprises, for each element of the list, a
3 respective number of times programs having that feature value
4 were not watched.

1 7. The data processing device of claim 6, wherein the processor
2 is further arranged to perform the following, each time a
3 user watches a new program,
4 ➤ first adding, to the list, feature values or counts of such
5 feature values, associated with that new program;
6 ➤ selecting at least one companion program to the new
7 program, the companion program being selected at random from
8 a program schedule, which companion program has not been
9 watched; and

10 ➤ second adding, to the list, feature values of the companion
11 program, or counts of such feature values.

1 8. The data processing device of claim 5, wherein the processor
2 is further arranged to perform the following, each time a
3 user watches a new program: first adding, to the list,
4 feature values or counts of such feature values, associated
5 with that new program;

9. The data processing device of claim 2, wherein the medium
 embodies the data regarding the television program.

10. The data processing device of claim 1, wherein the input is a
 network connection.

11. The data processing device of claim 1, wherein calculating
 comprises using a Bayesian classifier.

12. The data processing device of claim 11, wherein the
 processor is further adapted to subject the viewer profile to
 a noise threshold calculation prior to using the Bayesian
 classifier.

1 13. The data processing device of claim 12, wherein
2 ➤ the viewer profile data comprises
3 ➤ a list of feature values;
4 ➤ a respective negative count for each element of the list,
5 the negative count indicating a number of times programs
6 having that feature value have not been watched;
7 ➤ a respective positive count for each element of the list,
8 the positive count indicating a number of times programs
9 having that feature value have been watched;
10 ➤ the noise threshold calculation comprises
11 ➤ selecting a sub-list comprising at least feature values
12 having at least one specific type of feature;
13 ➤ choosing the highest negative count in the sub-list as the
14 noise threshold;
15 the recommendation comprises a program selected from a group
16 having at least one feature value having a positive or negative
17 count in the viewer profile, which count exceeds the noise
18 threshold.

1 14. The data processing device of claim 12, wherein subjecting
2 the viewer profile to the noise threshold further comprises using
3 observations gathered by a known random process to estimate a
4 reasonable noise threshold.

15.The data processing device of claim 13, wherein the specific type comprises a day and time of day feature type.

16.The data processing device of claim 13, wherein the specific type comprises a station identification feature type.

1 17.The data processing device of claim 1, wherein the viewer
2 profile data comprises a plurality of respective counts of
3 programs watched, each respective count indicating how many
4 programs watched had a respective feature.

1 18.The data processing device of claim 17, wherein calculating
2 comprises calculating a probability that the television
3 program is in a particular class.
4

1 19.The data processing device of claim 18, wherein the class is
2 one of

3 ➤ programs the viewer is interested in, and

4 ➤ programs the viewer is not interested in.

1 20. The data processing device of claim 1, wherein calculating
2 the probability comprises:

- 3 - computing a prior possibility, of whether a program is
4 desired or not;
- 5 - computing a conditional probability of whether a feature fi
6 will be present if a show is desired or not; and
- 7 - computing a posterior probability of whether program is
8 desired or not, based on the conditional probability and the
9 prior probability.

1 21.The data processing device of claim 1, wherein it is assumed
2 that programs watched are programs that the viewer is
3 interested in.

1 22. The data processing device of claim 1, wherein the processor
2 is further adapted to provide a recommendation regarding an
3 additional item, other than a television program, based on the
4 viewer profile.

1 23. The data processing device of claim 1, wherein the processor
2 is further adapted to occasionally recommend a surprise show
3 that has relatively few features in common with watched shows.

1 24. The data processing device of claim 1, wherein

- 2 ➤ the viewer profile comprises a list of features types and
- 3 values for such feature types;
- 4 ➤ the feature types are selected from at least two sets,
- 5 including
 - 6 ➤ a first set of feature types whose values are deemed non-
 - 7 independent; and
 - 8 ➤ a second set of feature types whose values are deemed
 - 9 independent; and
- 10 ➤ calculating a probability comprises
 - 11 ➤ applying a Bayesian classifier calculation corresponding to
 - 12 feature types from the second set; and
 - 13 ➤ applying a modified Bayesian classifier calculation

14 corresponcing to feature types from the first set.

1 25. The data processing device of claim 24, wherein
2 ➤ with respect to features of the first set, the modified
3 Bayesian classifier calculation considers only feature values
4 that match with a show being classified.

1 26. At least one medium readable by a data processing device and
2 embodying software arranged to perform the following
3 operations:

- 4 - calculating a probability that a television program is
5 a desired one, based on a viewer profile and data
6 regarding the television program; and
- 7 - supplying a recommendation regarding the television
8 program based on the probability.

27. The at least one medium of claim 26, wherein the at least
 one medium further embodies the viewer profile.

28. The at least one medium of claim 27, wherein the viewer
 profile is arranged so as to be incrementally updatable.

1 29. The at least one medium of claim 27, wherein the viewer

profile is embodied as a data structure comprising:

- a list of feature values; and
- for each element of the list, a respective number of times programs having that feature value were watched.

30. The at least one medium of claim 29, wherein the data structure further comprises, for each element of the list, a respective number of times programs having that feature value were not watched.

31. The at least one medium of claim 30, wherein the software is further arranged to perform the following, each time a user watches a new program,

- first adding, to the list, feature values or counts of such feature values, associated with that new program;
- selecting at least one companion program to the new program, the companion program being selected at random from a program schedule, which companion program has not been watched; and
- second adding, to the list, feature values of the companion program, or counts of such feature values.

32. The at least one medium of claim 29, wherein the software

2 is further arranged to perform the following, each time a user
3 watches a new program: first adding, to the list, feature
4 values or counts of such feature values, associated with that
5 new program.

33 The at least one medium of claim 26, wherein the at least
one medium embodies the data regarding the television
program.

34 The at least one medium of claim 26, wherein calculating
comprises using a Bayesian classifier.

35 The at least one medium of claim 34, wherein the software is
further adapted to subject the viewer profile to a noise
threshold calculation prior to using the Bayesian
classifier.

1 36 The at least one medium of claim 35, wherein
2 ➤ the viewer profile data comprises
3 ➤ a list of feature values;
4 ➤ a respective negative count for each element of the list,
5 the negative count indicating a number of times programs
6 having that feature value have not been watched;

- 7 ➤ a respective positive count for each element of the list,
- 8 the positive count indicating a number of times programs
- 9 having that feature value have been watched;
- 10 ➤ the noise threshold calculation comprises
- 11 ➤ selecting a sub-list comprising at least feature values
- 12 having at least one specific type of feature;
- 13 ➤ choosing the highest negative count in the sub-list as the
- 14 noise threshold;
- 15 ➤ the recommendation comprises a program selected from a group
- 16 having at least one feature value having a positive or negative
- 17 count in the viewer profile exceeding the noise threshold.

37. The data processing device of claim 35, wherein subjecting the viewer profile to the noise threshold further comprises using observations gathered by a known random process to estimate a reasonable noise threshold.

38. The at least one medium of claim 36, wherein the specific type comprises a day and time of day feature type.

39. The at least one medium of claim 36, wherein the specific type comprises a station identification feature type.

- 1 40. The at least one medium of claim 26, wherein the viewer
2 profile data comprises a plurality of respective counts of
3 programs watched, each respective count indicating how many
4 programs watched had a respective feature.
- 1 41. The at least one medium of claim 40, wherein calculating
2 comprises calculating a probability that the television
3 program is in a particular class.
- 4 42. The at least one medium of claim 40, wherein the class
5 comprises at least one of programs the viewer is interested
6 in and programs the viewer is not interested in.
- 7 43. The at least one medium of claim 26, wherein calculating the
8 probability comprises:
9
- 1 - computing a prior possibility, of whether a program is
2 desired or not;
 - 3 - computing a conditional probability of whether a feature fi
4 will be present if a show is desired; and
 - 5 - computing a posterior probability of whether program is
6 desired or not, based on the conditional probability and the
7 prior probability.

1 44. The at least one medium of claim 26, wherein it is assumed
2 that programs watched are programs that the viewer is
3 interested in.

1 45. The medium of claim 26, wherein the software is further
2 arranged to provide a recommendation regarding an additional
3 item, other than a television program, based on the viewer
4 profile.

1 46. The at least one medium of claim 26, wherein the software is
2 further arranged to occasionally recommend a surprise show
3 that has relatively few features in common with watched show.

1 47. The at least one medium of claim 26, wherein

- 2 ➤ the viewer profile comprises a list of features types and
3 values for such feature types;
- 4 ➤ the feature types are selected from at least two sets,
5 including
- 6 ➤ a first set of feature types whose values are deemed non-
7 independent; and
- 8 ➤ a second set of feature types whose values are deemed
9 independent; and

- 10 ➤ calculating a probability comprises
- 11 ➤ applying a Bayesian classifier calculation corresponding to
- 12 feature types from the second set; and
- 13 ➤ applying a modified Bayesian classifier calculation
- 14 corresponding to feature types from the first set.

1 48. The at least one medium of claim 47, wherein with respect to
2 features of the first set, the modified Bayesian classifier
3 calculation considers only values that match with a show being
4 classified.

1 49. A computer method comprising performing the following
2 operations in a data processing device:
3 - Receiving a set of data;
4 - Filtering the data in accordance with a noise criterion;
5 - Drawing a conclusion from the filtered data based on a
6 Bayesian classifier calculation; and
7 - Presenting the conclusion to a user.

1 50. The method of claim 49 wherein the noise criterion is based
2 on a frequency of instances of a particular types of data
3 within set, which types are believed to likely represent
4 noise.

1 51. A data processing method comprising performing the following
2 operations in a data processing device:

3 - first receiving data reflecting physical observations, which
4 data includes a list of feature values and observations
5 about feature values, some of which feature values are
6 independent and some of which are not;

7 - second receiving data about an item to be classified, the
8 data about the item to be classified including feature
9 values;

10 - maintaining a division of the data reflecting physical
11 observations into at least two sets, including

12 - a first set including those feature values which are
13 deemed not independent; and

14 - a second set including those feature values which are
15 deemed independent;

16 - performing a probabilistic calculation on the data
17 reflecting physical observations and the data regarding an
18 item to be classified including:

19 - applying a Bayesian classifier calculation with respect
20 to feature values relating to the second set; and

21 - applying a modified Bayesian classifier calculation

22 with respect to feature values relating to the first
23 set
24 - presenting a conclusion regarding the item to be classified
25 to a user based on the probabilistic calculation.

52. The method of claim 51, wherein the modified Bayesian classifier calculation comprises ignoring feature values from the data reflecting physical observations when those feature values are not present in the data regarding the item to be classified .

VI. ABSTRACT OF THE DISCLOSURE

A system for recommending television programs makes use of probabilistic calculations and a viewer profile to create a recommendation. The probabilistic calculations preferably are in the form of Bayesien classifier theory. Modifications to classical Bayesian classifier theory are proposed.

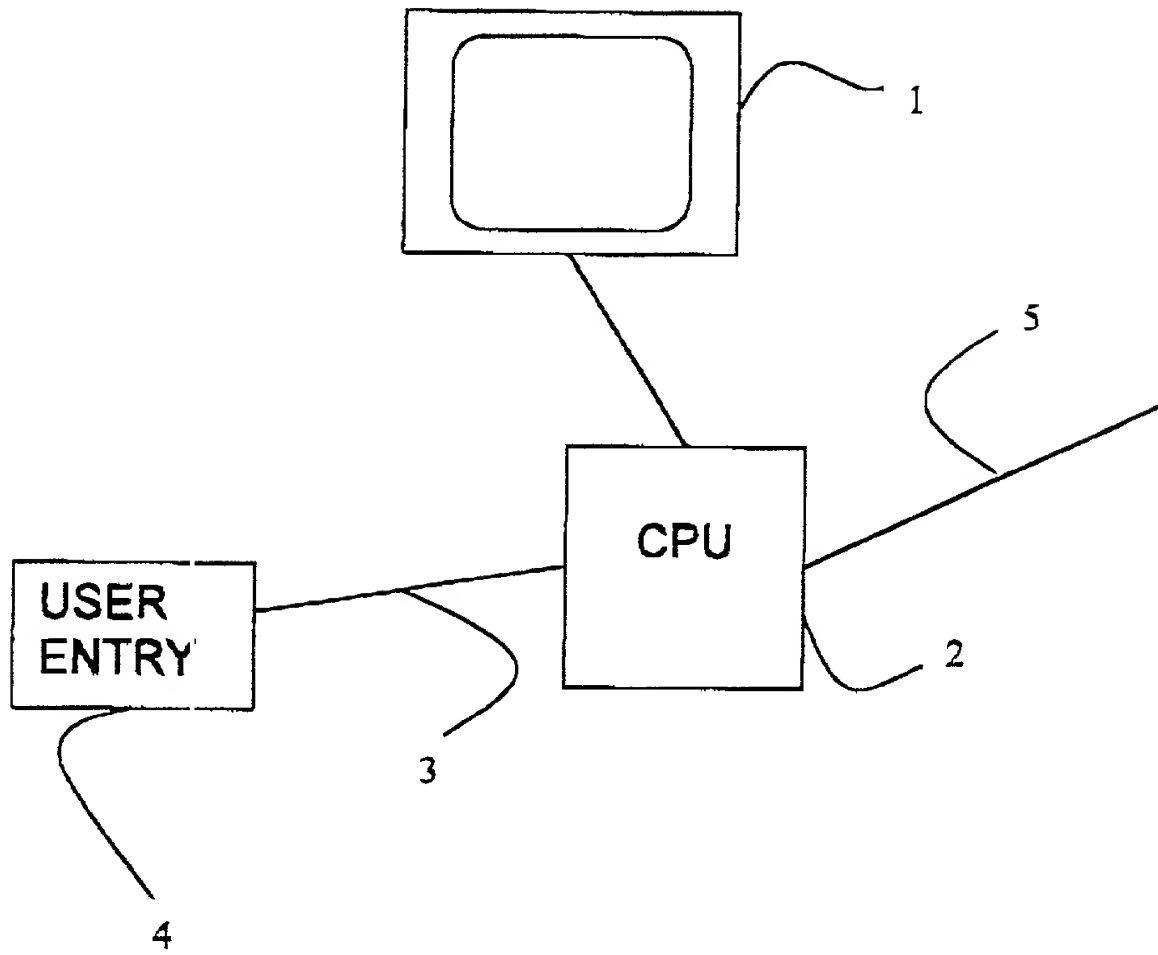


FIG. 0

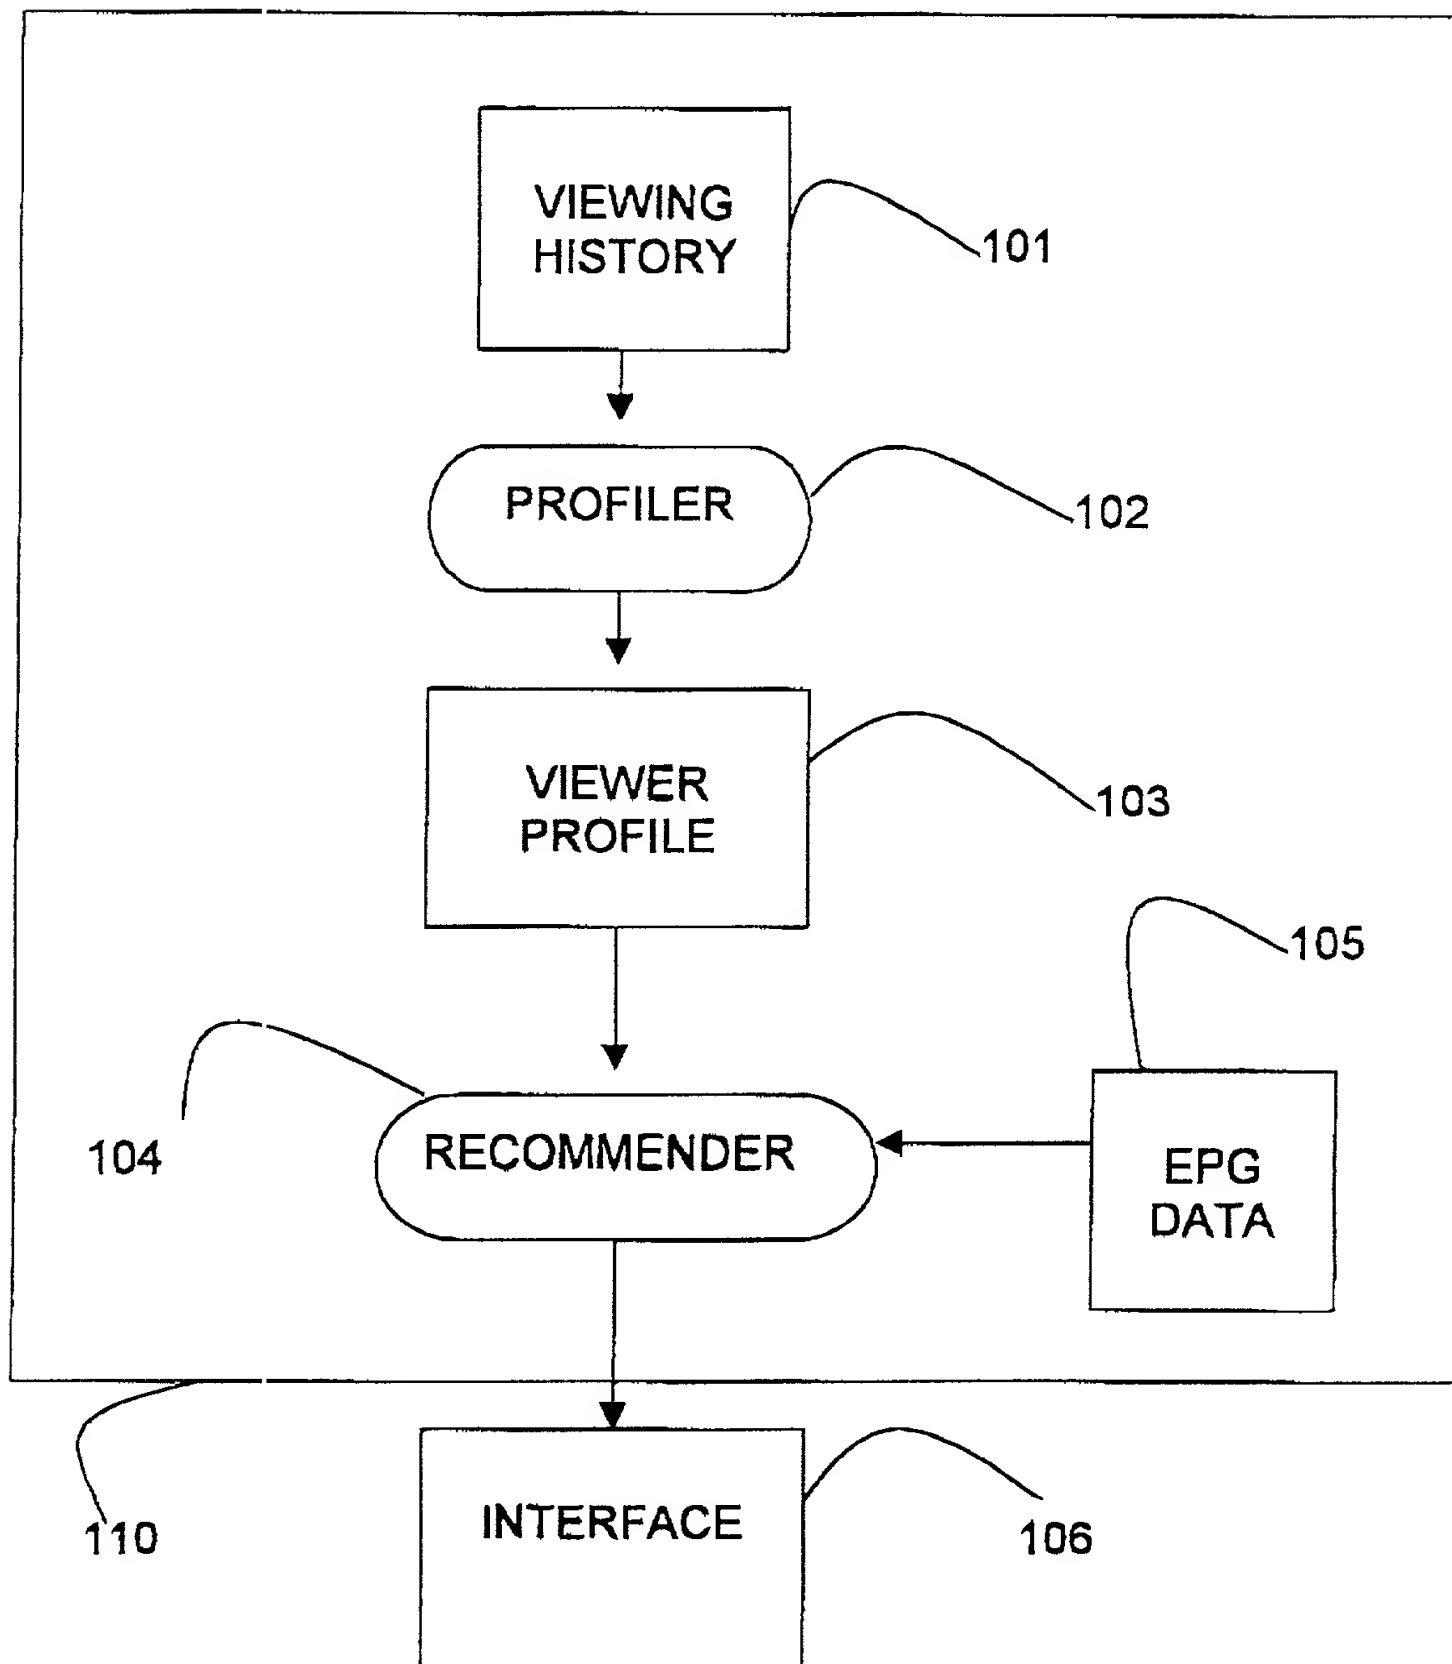


FIG. 1

Let S be all shows not watched in the 7 days prior to and including the current day

Let N be 1.

For each TV show watched

Enter the watched show in the viewing history as a positive example

Select a subset S of shows not watched

Select at random N shows from set S and enter them in the viewing history as negative examples. If an explicit viewer profile is available, then the random selection can be biased away from shows "liked" and towards shows "not liked."

Figure 2. Pseudo code for the Viewing history generator

Table 1. The key fields

Field	Description
\$date	yyyymmdd
\$air_time	hhmm (e.g. some value in the range 0000-2359)
\$station_sign	4 characters (e.g. WABC)
\$title	120 characters (e.g. "Antiques Roadshow")
\$desc	120 characters (e.g. "Sully visits alien spacecraft")
\$genre	20 characters (e.g. "Science Fiction")
\$actors	120 characters (e.g. "John Doe, Jane Doe")
\$directors	120 characters (e.g. "John Hitchcock")
\$hosts	120 characters (e.g. "John Host")
\$producers	120 characters (e.g. "Jane Rich, John Moneybags")
\$writers	120 characters (e.g. "John Poet")

FIG. 3

totalprograms	55	55
daytime Mon2100	5	0
daytime Mon2200	6	1
daytime Tue2200	4	1
daytime Wed2000	4	0
daytime Wed2200	6	0
station WABC	10	1
station WNBC	30	0
station WNYW	13	0
title 20/20	5	0
title Dateline NBC	11	0
title MLB Playoffs	10	0
title Paid Programming	0	5
genre Animated	0	4
genre Baseball	13	1
genre Comedy	4	8
genre Football	4	0
genre Magazine	18	0
genre News	22	4
genre Reality	4	1
genre Situation	3	5
genre Sports Event	15	2
genre Talk	18	3
desc Ally	6	0
desc If	6	0
desc McBeal	4	0
desc alternate	5	0
desc game	4	0
desc lineup	5	0

desc local	4	0
desc necessary	6	0
desc primetime	5	0
desc programming	4	0
TV rating TV14	6	3
TV rating TVG	0	4
sex rating N	51	52
language rating N	51	50
advisory Adult Situations	0	8
advisory Language	0	5
MPAA rating R	0	4
star rating **+	0	5
program language English	51	52
country of origin United States	0	7
episode title Game	7	0
episode title League	4	0
episode title New	5	0
episode title Series	9	0

FIG. 4

FIG. 5A

$$T = k(C+) + k(C-)$$

$$P(C+) = k(C+)/T$$

$$P(C-) = k(C-)/T$$

FIG. 5B

$$P(fil|C+) = k(fil|C+)/k(C+)$$

$$P(fil|C-) = k(fil|C-)/k(C-)$$

FIG. 5C

$$P(C+|x) = P(x|C+)P(C+)/P(x)$$

$$P(C-|x) = P(x|C-)P(C-)/P(x)$$

Where

$$P(x) = P(x|C+)P(C+) + P(x|C-)P(C-)$$

$$P(x|C+) = \prod_{i=1}^n P(f_i|C+)^{x_i} (1 - P(f_i|C+))^{1-x_i}$$

n= number of features in profile

f_i= the ith feature in the profile

x = {0,1}ⁿ is a bit string of length n, where the ith bit indicates the presence (1) or absence (0) of feature f_i in the program

US000018

DECLARATION and POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **Adaptive TV Program Recommender**

the specification of which (check one)

☒ is attached hereto.

☐ was filed on _____ as Application Serial No. _____ and was amended on _____

☐ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by the amendment(s) referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulation, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

COUNTRY	APPLICATION NUMBER	DATE OF FILING (DAY, MONTH, YEAR)	PRIORITY CLAIMED UNDER 35 U.S.C. 119

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application (s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

PRIOR UNITED STATES APPLICATION(S)

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (PATENTED, PENDING, ABANDONED)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Algy Tamoshunas, Reg. No. 27,677

Jack E. Haken, Reg. No. 26,902

SEND CORRESPONDENCE TO: Corporate Patent Counsel, U.S. Philips Corporation, 580 White Plains Road, Tarrytown, NY 10591	DIRECT TELEPHONE CALLS TO: Gregory L. Thorne (914) 333-9665
--	--

US000018

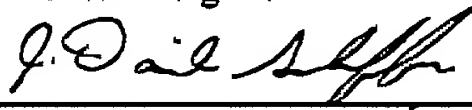Dated: 2000-2-4		Inventor's Signature: 		
Full Name of Inventor	Last Name: Schaffer	First Name : J.	Middle Name: David	
Residence & Citizenship	City Wappingers Falls	State or Foreign Country New York	Country of Citizenship United States of America	
Post Office Address	Street 101 Edgehill Drive	City Wappingers Falls	State or Country New York	Zip Code 12590

Dated:		Inventor's Signature:		
Full Name of Inventor	Last Name:	First Name :	Middle Name:	
Residence & Citizenship	City	State or Foreign Country	Country of Citizenship	
Post Office Address	Street	City	State or Country	Zip Code

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Atty. Docket

J. DAVID SCHAFFER

US000018

Serial No.

Filed: CONCURRENTLY

Title: ADAPTIVE TV PROGRAM RECOMMENDER

Commissioner of Patents and Trademarks
Washington, D.C. 20231

APPOINTMENT OF ASSOCIATES

Sir:

The undersigned Attorney of Record hereby revokes all prior appointments (if any) of Associate Attorney(s) or Agent(s) in the above-captioned case and appoints:

EDWARD W. GOODMAN

(Registration No. 28,613)

c/o U.S. PHILIPS CORPORATION, Intellectual Property Department, 580 White Plains Road, Tarrytown, New York 10591, his Associate Attorney(s)/Agent(s) with all the usual powers to prosecute the above-identified application and any division or continuation thereof, to make alterations and amendments therein, and to transact all business in the Patent and Trademark Office connected therewith.

ALL CORRESPONDENCE CONCERNING THIS APPLICATION AND THE LETTERS PATENT WHEN GRANTED SHOULD BE ADDRESSED TO THE UNDERSIGNED ATTORNEY OF RECORD.

Respectfully,


Jack E. Haken, Reg. 26,902
Attorney of Record

Dated at Tarrytown, New York
this 4th day of February, 2000.